



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2020 VERSION 1.1 COPYRIGHT 2020/08



X Series 3W Electric Forklift

with capacities of 800 to 1,000kg

The World of Hangcha
SINCE 1956



X Series 3W Electric Forklift

Hangcha's X series 0.8-1.0t 3W electric forklifts are a new series of high-efficiency, energy-saving small-tonnage electric counterbalanced forklifts with a new structure that represents a breakthrough over the traditional design concept. With a compact structure, small turning radius and light weight and high maneuverability, the truck is widely used in narrow operation places, e.g., used for handling between floors, to and from elevators or in warehouses, supermarkets, workshops, etc.



Appearance

/ The whole truck is small and flexible, adopting a combination of straight lines and streamlined curved surfaces, with a simple appearance and strong strength.

Stability

/ Thanks to the low center of gravity layout and design of the battery and counterweight, the vehicle has a low center of gravity and good stability.
/ The steering wheel adopts two rubber wheels, with good turning stability.

Energy saving and high efficiency

/ The front-wheel drive provides, strong power, high driving speed, high lifting speed, strong climbing ability and high operating efficiency.
/ The front wheel is equipped with patterned rubber tires, so it is not easy to slip on the ground with water, sand, slope, and cold storage.
/ EPS (Electric Power Steering) system only works when turning, so that energy consumption can be reduced significantly.
/ Built-in charger improves efficient and convenient operation greatly.
/ The truck is equipped with energy-saving and durable LED lights.

Comfort


/ Excellent ergonomic design and large operation space provide the operator with more comfort, and satisfy the operator's needs for long-term and high-intensity operations.
/ EPS (Electric Power Steering) system, and a comfortable steering force can be adjusted with software, so that the steering is easier and the work intensity of the operator is reduced.
/ The angle of the steering wheel column is adjustable and the seat can be adjusted backwards and forwards, so that the operator can get a good ride experience.
/ The multi-way valve is easy to operate, reducing the work intensity of the operator.

Safety

/ The optimized design of the wide-view mast and the low dashboard enable a wide front view and higher safety, and minimizes the blind view to the greatest extent.
/ The emergency power-off switch complies with European safety standards.
/ The electronic and hydraulic overload protection comply with safety regulations.
/ OPS system(Opt.) can improve safety greatly.



Wide view mast

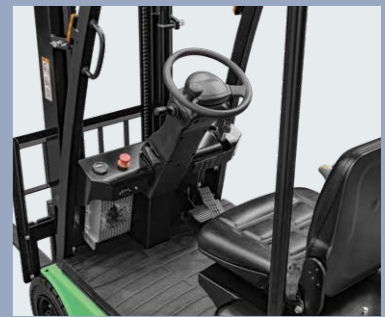

Large and comfortable operation space



LED meter



Built-in charger



Lithium battery pack



Standard Specification:

- / Tread solid tire
- / Anti-skid patterned step
- / Dual multiway valve
- / Silent gear pump
- / 2.5m duplex wide-view mast
- / Fork length 770mm
- / Adjustable steering wheel column
- / Rearview mirror
- / Emergency power off switch
- / Color screen instrument
- / Front LED headlight
- / Rear combination LED light
- / Built-in charger
- / Horn, reversing buzzer

Advancement

- / Full AC motors, precise speed control, maintenance-free, temperature monitoring.
- / Equipped with an AC controller, so that the driving, steering, lifting, tilting and other actions can be controlled by a computer.
- / The high-efficiency driving control system with a high-frequency integrated MOSFET controller ensures stable and accurate driving and lifting and superior speed regulation performance, and has the functions of regenerative braking, reverse braking and protection for preventing sliding down a ramp, etc. to enable safer and more effective and comfortable operations.
- / The LED meter can accurately display information in harsh environments.

Options:

- / Non-marked solid tire
- / Triple multiway valve
- / 2-4.5m duplex wide-view mast
- / 2-4m full free duplex mast
- / 3.5-4.5m triplex mast
- / Widened fork carriage and load backrest
- / External sidsifter
- / Other attachments
- / Foldable forks of different lengths
- / Forks of other lengths
- / Cold storage
- / Left and right rear view mirrors
- / Rear LED working light
- / Warning light
- / Charger
- / OPS system



Optional battery capacity		
Capacity (Ah/5h)	0.8t	1t
240(Lithium)	●	●
300(Lithium)	○	○
294(Lead-acid)	○	—
336(Lead-acid)	○	—
400(Lead-acid)	○	○

Note: ● Battery, ○ Battery Opt; — Null



X Series 3W Electric Forklift Specification

Distinguishing mark	HANGCHA GROUP CO.,LTD.						
	CPDS08-XD2 CPDS10-XD2 CPDS08-XD2-I* CPDS10-XD2-I*						
1.1	Manufacturer (abbreviation)						
1.2	Manufacturers type designation						
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	electric	electric	electric	electric		
1.4	Operator type: hand, pedestrian, standing, seated, order-picker	seated	seated	seated	seated		
1.5	Load capacity/rated load	Q (kg)	800	1000	800	1000	
1.6	Load centre distance	c (mm)	400	400	400	400	
1.8	Load distance, centre of drive axle to fork	x (mm)	290	290	290	290	
1.9	Wheelbase	y (mm)	1150	1150	1150	1150	
Weight	2.2	Service Weight	kg	1550	1740	1550	1710
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	solid rubber	solid rubber	solid rubber	solid rubber	
3.2	Tyre size, front		4.00-8	4.00-8	4.00-8	4.00-8	
3.3	Tyre size, rear		3.50-5	3.50-5	3.50-5	3.50-5	
3.5	Wheels, number front rear (x = driven wheels)		2x/2	2x/2	2x/2	2x/2	
3.6	Tread, front	b10 (mm)	788	788	788	788	
3.7	Tread, rear	b11 (mm)	350	350	350	350	
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	Grad	5/10	5/10	5/10	5/10
4.2	Height, mast lowered	h1 (mm)	1755	1755	1755	1755	
4.3	Free lift	h2 (mm)	100	100	100	100	
4.4	Lift	h3 (mm)	2500	2500	2500	2500	
4.5	Height, mast extended	h4 (mm)	3300	3300	3300	3300	
4.7	Height of higher overhead guard(cabin) .	h6 (mm)	1930	1930	1930	1930	
4.8	Seat height relating to SIP/stand height	h7 (mm)	980	980	980	980	
4.19	Overall length	l1 (mm)	2415	2415	2415	2415	
4.20	Length to face of forks	l2 (mm)	1645	1645	1645	1645	
4.21	Overall width	b1 (mm)	900	900	900	900	
4.22	Fork dimensions ISO 2331	s/e/l (mm)	30/80/770	30/80/770	30/80/770	30/80/770	
4.23	Fork carriage ISO 2328, class/type A,B		ISO2328 1A	ISO2328 1A	ISO2328 1A	ISO2328 1A	
4.24	Fork-carriage width	b3 (mm)	860	860	860	860	
4.25	Distance between fork-arms	b5 (mm)	160/780	160/780	160/780	160/780	
4.31	Ground clearance, laden, below mast	m1 (mm)	75	75	75	75	
4.32	Ground clearance, centre of wheelbase	m2 (mm)	75	75	75	75	
4.33	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	2955	2955	2955	2955	
4.34	Aisle width for pallets 800 x 1200 crossways	Ast (mm)	3155	3155	3155	3155	
4.35	Turning radius	Wa (mm)	1465	1465	1465	1465	
Performance data	5.1	Travel speed, laden/unladen	km/h	10/12	10/12	10/12	10/12
5.2	Lift speed, laden/unladen	mm/s	250/370	240/370	250/370	240/370	
5.3	Lowering speed, laden/unladen	mm/s	410	410	410	410	
5.6	Max. Drawbar pull, laden/unladen	N	4400/4600	4400/4600	4400/4600	4400/4600	
5.8	Max. gradeability, laden/unladen	%	12/13	12/13	12/13	12/13	
5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	
5.11	Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	
Electric-engine	6.1	Drive motor rating S2 60 min	kW	3	3	3	3
6.2	Lift motor rating at S3 15%	kW	4	4	4	4	
6.3	Battery acc. to DIN 43 531/35/36 A,B,C, no		no	no	no	no	
6.4	Battery voltage, nominal capacity K5	V/Ah	24/294	24/400	24/240	24/240	
6.5	Battery weight	kg	270	340	95	95	
Addition data	8.1	Manufacturer of controler		INMOTION	INMOTION	INMOTION	INMOTION
8.4	Sound level at the driver's ear according to EN / DIN 12 053	dB (A)	67	67	67	67	

Note: * means lithium battery

Mast Specification

Type	Model	Lift height	Lowered height	Extended height		Free lift height		Tilt range		Capacity (Mast vertical to ground)	
				With backrest	Without backrest	With backrest	Without backrest	Forward	Backward	Load center@400mm Single Tire	
				mm	mm	mm	mm	deg	deg	0.8t	1.0t
2-stage wide view mast	M200	2000	1505	2800	2475	100	100	5	10	800	1000
	M250	2500	1755	3300	2975	100	100	5	10	800	1000
	M270	2700	1855	3500	3175	100	100	5	10	800	1000
	M300	3000	2005	3800	3475	100	100	5	10	800	1000
	M330	3300	2155	4100	3775	100	100	5	10	800	1000
	M350	3500	2255	4300	3975	100	100	5	10	800	1000
	M370	3700	2355	4500	4175	100	100	4	8	750	900
	M400	4000	2605	4800	4570	100	100	4	8	700	850
	M430	4300	2785	5100	4900	100	100	4	8	650	800
	M450	4500	2905	5300	5120	100	100	4	8	600	700
2-stage full-free lifting mast	U200	2000	1505	2800	2495	705	1010	5	10	800	1000
	U250	2500	1755	3300	2995	955	1260	5	10	800	1000
	U270	2700	1855	3500	3195	1055	1360	5	10	800	1000
	U300	3000	2005	3800	3495	1255	1510	5	10	800	1000
	U330	3300	2155	4100	3795	1355	1660	5	10	800	1000
	U350	3500	2255	4300	3995	1455	1760	5	10	750	900
	U370	3700	2355	4500	4195	1555	1860	4	8	700	850
	U400	4000	2605	4800	4545	1755	2010	4	8	600	700
	N350	3500	1675	4310	4015	875	1170	4	8	700	800
	N370	3700	1735	4500	4195	935	1240	4	8	650	750
3-stage full-free lifting mast	N400	4000	1835	4800	4495	1035	1340	4	8	600	650
	N430	4300	1935	5100	4795	1135	144	4	8	500	550
	N450	4500	2005	5310	5005	1205	1510	4	8	400	450

